



STABLE EDGE[®]

ALUMINUM PAVER RESTRAINT



For Keeping . . .




Concrete Pavers...



Clay Pavers...



Travertine pavers...

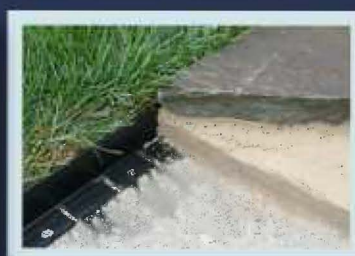

or Natural Stone...

- 
- **Flexible**
 - **Will Not Rust**
 - **Durable**
 - **Reversible**

Ideal Restraint for:

- Entryways
- Walkways
- Pathways
- Patios
- Driveways
- Courtyards
- Cartpaths
- And more

STABLE EDGE® is made of an aerospace grade aluminum alloy that will never rust like steel or warp like plastic restraints.

Available in
Mill Finish
and Black

"We choose Stable Edge because of its versatility and durability. The same piece that is used to create curves can also be used for straight runs. It also can be installed with the flange under the pavers or outside of the pavers."

*-Jeff Rand
Rand Stoneworks, Inc.*

Curv-Rite®, Inc.
Wayland, MI USA
800-366-2878
www.curv-rite.com

CURV-RITE[®] PRODUCTS: TECHNICAL SPECIFICATIONS

Technical Specifications for: STABLE EDGE[®] Aluminum Paver Restraint

Brick paver edging to be **Stable Edge** 1/8" x 1-5/8" (3.2mm x 41mm) "L" shaped aluminum paver restraint in an 8' section with a **(finish)** as manufactured by Curv-Rite, Inc; Wayland, MI. 1-800-366-2878. Sections to be aluminum alloy 6063 with a T-6 hardness. A 3" aluminum splicer inserted 1-1/2" into each adjoining section shall be used to create an uninterrupted edging system that has a continuous support surface on both sides of the vertical wall. Edging base shall have holes on 4" centers along length of section for receiving 3/8" x 10" spiral steel spikes. **(specify qty. of spikes per section-up to 25 max)** spikes shall be used per 8-ft. section.

Thickness: 1/8"


Depth: 1 - 5/8 "

Finish: Natural Aluminum Finish (Mill)

Deco-Black Finish (.0008 to .0012 inch thick)
(Electrostatic Enamel Acrylic)

Curv-Rite® Stable Edge®
Aluminum Paver Restraint
1-800-366-2878

2.) Under Paver

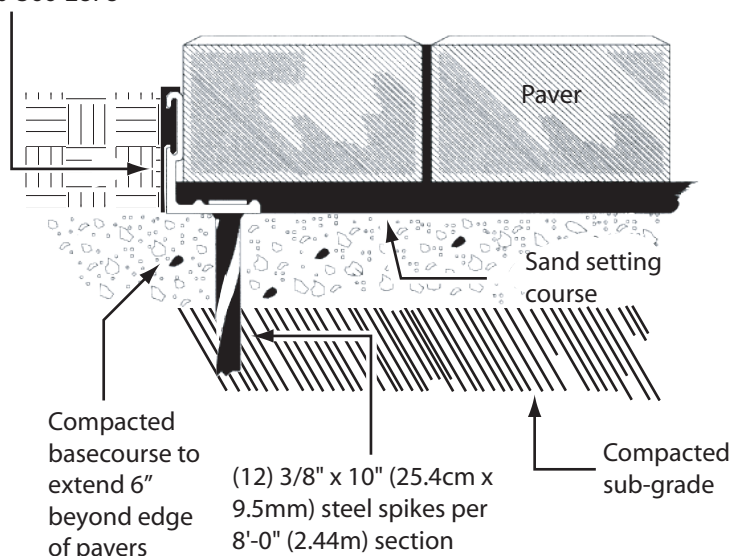

Check Desired Size:

- ☐ 3/32" x 1- 5/8" (2.4mm x 41mm)
- ☐ 1/8" x 1- 5/8" (3.2mm x 41mm)
- ☐ 3/16" x 1- 5/8" (4.8mm x 41mm)
- ☐ 1/8" x 2-1/4" (3.2mm x 57mm)
- ☐ 3/16" x 2-1/4" (4.8mm x 57mm)

Check Desired Finish:

- ☐ **Mill Finish** - natural aluminum.
- ☐ **Deco-Black** - electrostatically applied baked on paint.

Notes:

1. Refer to manufacturer's installation instructions from, Curv-Rite, Inc. Wayland, Michigan, 1-800-366-2878.
2. Connection between strips to utilize manufacturer's unique interlocking splicer.
3. Do not scale drawing.
4. Curv-Rite Stable Edge as manufactured by Curv-Rite, Inc. Wayland, MI 1-800-366-2878, (269) 792 - 0044 , (269) 792-8126 fax.


Edge Detail-PAVER RESTRAINT INSTALLED UNDER PAVERS

Curv-Rite Stable Edge® Aluminum Paver Restraint

3603 North Main Street Wayland, MI
800-366-2878 www.curv-rite.com

Curv-Rite® Stable Edge®
Aluminum Paver Restraint
1-800-366-2878

1.) Outside Paver

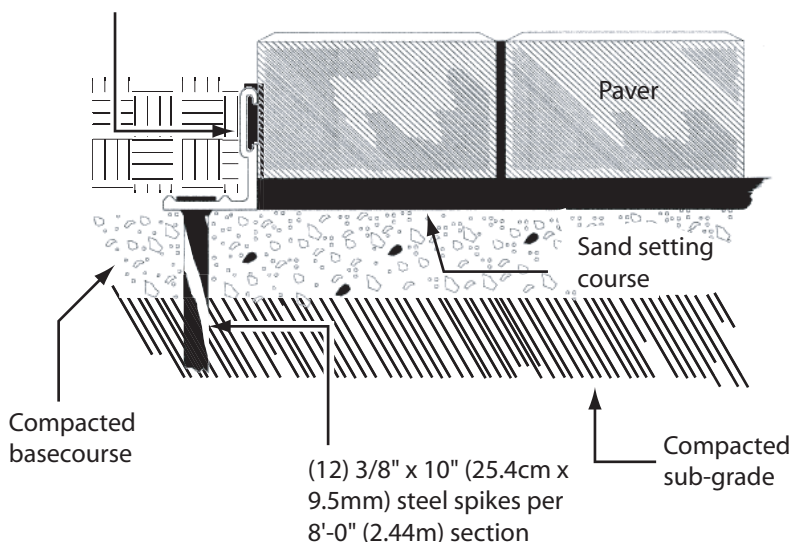

Check Desired Size:

- ☐ 3/32" x 1- 5/8" (2.4mm x 41mm)
- ☐ 1/8" x 1- 5/8" (3.2mm x 41mm)
- ☐ 3/16" x 1- 5/8" (4.8mm x 41mm)
- ☐ 1/8" x 2-1/4" (3.2mm x 57mm)
- ☐ 3/16" x 2-1/4" (4.8mm x 57mm)

Check Desired Finish:

- ☐ **Mill Finish** - natural aluminum.
- ☐ **Deco-Black** - electrostatically applied baked on paint.

Notes:

1. Refer to manufacturer's installation instructions from Curv-Rite, Inc. Wayland, Michigan, 1-800-366-2878.
2. Connection between strips to utilize manufacturer's unique interlocking splicer.
3. Do not scale drawing.
4. Curv-Rite Stable Edge as manufactured by Curv-Rite, Inc. Wayland, MI 1-800-366-2878, (269) 792 - 0044 (269) 792-8126 fax.

Edge Detail-Sand Set Paver Installation

Curv-Rite® Stable Edge® Aluminum Paver Restraint

3603 North Main Street Wayland, MI
800-366-2878 www.curv-rite.com