

InstaGreen® Sedum Carpet



Product Information

Size/Coverage 48"W x 75"L (25.0 SF/roll)
 Weight 3.2 lbs/SF (delivery weight), 80.0 lbs per roll
 5.0 lbs/SF (fully saturated), 125.0 lbs per roll
 Fiber/Soil Base Approx. 1" thick



SEDUM CARPET FEATURES

Instant Green - Hydrotech's InstaGreen Sedum Carpets will typically be delivered with 85% plant coverage.

Maintenance - Minimal maintenance requirements once established.

Flexible Design - For a unique look perennial plants and/or plugs can be planted through the carpet during installation.

Sloped Installations - Enhanced erosion control makes a sedum carpet ideal for both low and steep slopes.

Varieties - Wide variety of sedums suiting different climates and exposures.



At time of delivery




Within 2-3 months

Typical Varieties	Zone	Height (inches)	Spread (inches)	Bloom Time	Bloom Color	Soil Depth
Sedum acre 'Gold Moss'	3-8	3-6	12-15	Jul-Aug	Yellow	3-4
Sedum album 'Coral Carpet'	4-8	6-9	6-8	Jul-Aug	White	3-4
Sedum album 'Murale'	3-9	2-4	4-8	May-Jun	White	3-4
Sedum floriferum 'Weihenstephaner Gold'	3-7	3-5	8-12	May-Jun	Yellow	3-4
Sedum hybridum 'Immergrunchen'	4-7	5-6	6-8	Jun-Sep	Yellow	3-4
Sedum kamtschaticum	4-7	5-6	6-8	Jun-Jul	Yellow	3-4
Sedum reflexum 'Blue Spruce'	5-7	4-6	8-12	May-Jun	Yellow	3-4
Sedum rupestre 'Angelina'	4-7	4-6	8-12	Jul-Aug	Yellow	3-4
Sedum sexangulare	4-7	3-4	6-8	Jul-Aug	Yellow	3-4
Sedum spurium 'Fuldaglut'	5-8	4-6	6-8	Jun-Jul	Red	3-4
Sedum spurium 'John Creech'	3-8	4-6	6-8	Jul-Aug	Pink	3-4
Sedum spurium 'Red Carpet'	3-7	3-4	8-10	Jul-Aug	Red	3-4
Sedum spurium 'Tricolor'	4-7	3-4	6-8	Jun-Jul	Pink	3-4
Sedum takesimensis 'Golden Carpet'	4-8	4-6	8-10	Jul-Aug	Yellow	3-4

Every variety will not be growing in each order shipped, but each order should contain at least 9 of the 15 varieties above.

REGIONAL AVAILABILITY

- Please refer to the map as a general guideline for InstaGreen® Sedum Carpet availability and appropriateness based on regional and climatic conditions. Each project is unique, therefore the appropriate selection of plants is critical to its success. Please contact Hydrotech for specific recommendations.

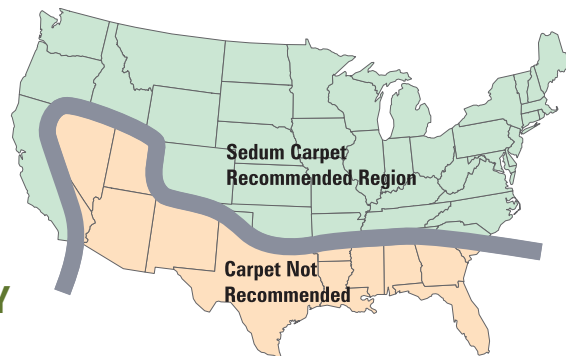

INSTAGREEN SEDUM CARPET CARE UPON DELIVERY

- Sedum Carpet should be installed the day it arrives.
- Pallets waiting to be installed should be stored in a cool, shady place.
- If Sedum Carpet cannot be installed the day it arrives, it must be unrolled in a cool, shady place and watered thoroughly. It cannot be allowed to remain rolled and on the pallets for more than 6 hours.

INSTALLING SEDUM CARPET

- All Garden Roof® Assembly components should be in place, and LiteTop® growing media should be installed and properly compacted prior to the delivery and installation of the InstaGreen Sedum Carpet.
- Water the media thoroughly before planting in order to give the water time to infiltrate down into the media.
- Just before the vegetation is laid out, the media should be raked to even out any low or high areas and watered again. The vegetation won't root well if the media is uneven or dry.
- Starting in one corner, place the Sedum Carpet or Sedum Tile and stagger the joints, making sure the mats have good contact with the media. Rake as needed to eliminate low or high areas created by foot traffic.
- Edges of the Sedum Carpet or Sedum Tile should fit snugly against the perimeter/edging and against each other.
- The mats are easily trimmed with a utility knife or heavy-duty shears. Trimmings should be used to fill in any bare spots.
- Once installed water thoroughly.
- High wind installations may require staking along a roof's perimeter and in corners. Contact Hydrotech for details.

COVERAGE WARRANTY*

- Hydrotech guarantees 90% coverage after the first and second years when part of a complete Garden Roof Assembly.
- Hydrotech's Maintenance Plan must be followed as part of warranty conditions.
- Rooftop access to sufficient water for irrigation is required, contact Hydrotech for details.

For additional information please contact your local Hydrotech Representative.

* Contact Hydrotech for additional warranty information.



American Hydrotech, Inc.
303 East Ohio Street, Chicago, Illinois 60611
800.877.6125; 312.337.4998
312.661.0731 (fax)
www.hydrotechusa.com

Hydrotech Membrane Corporation
10,951 Parkway, Ville D'Anjou, Quebec H1J 1S1
800.361.8924
514.354.6649 (fax)
www.hydrotechmembrane.ca